


SINGLE PUMPING STATION 8GPM, Model PSGLD3

The ***AVW SINGLE PUMPING STATION***
features a gravity feed tank, with adjustable controls contained inside of tank.
No dripping or leakage of fluids from controls on the floor.

- Heavy Duty Stainless Steel***
- Contained Controls***
- Clean Design***

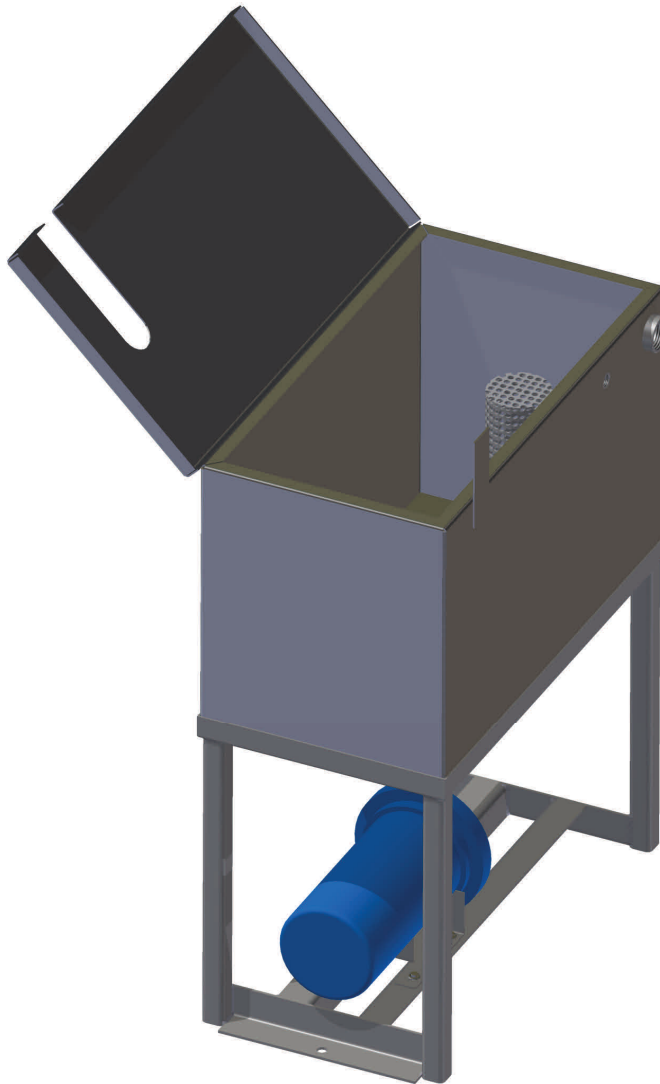

DIMENSIONS: 30"x16"Wx38H"LG
TANK: 30"x16W"x20H" LG







A.V.W. Equipment Co. Inc. 105 South 9th Avenue, Maywood, IL, 60153
Phone: 708-343-7738 Fax: 708-343-9065 email: info@avwequipment.com Website: www.avwequipment.com

SINGLE PUMPING STATION 8GPM, Model PSGLD3

GOULDS PUMP





4.HYDROMINDER

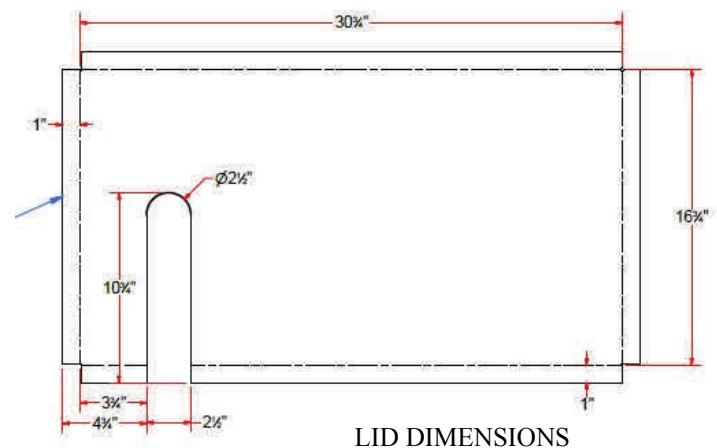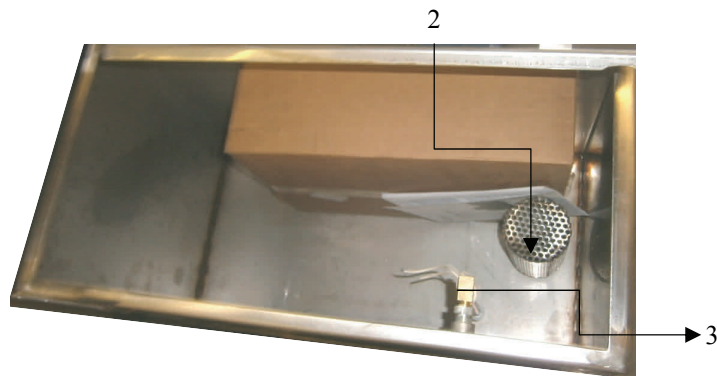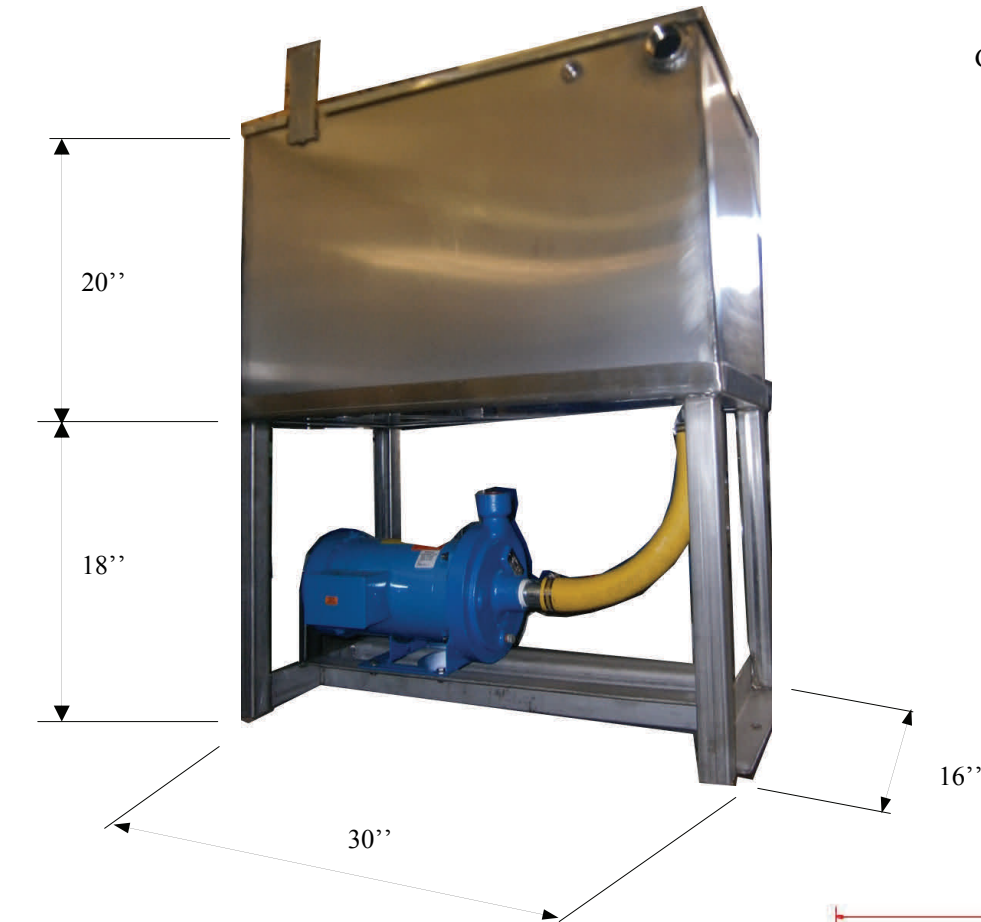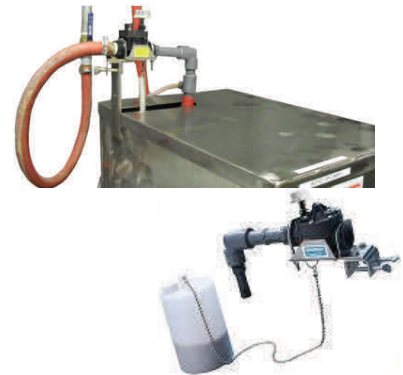


LID DIMENSIONS

STAND DIMENSIONS

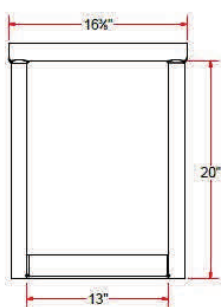

SINGLE PUMPING STATION-GOULDS 8GPM , Model PSGLD3

ITEM	DESCRIPTION	PART NO.	QTY.
1	CENTRIFUGAL PUMP- Centrifugal Pump, Straight Center Discharge, 2 HP, 3 Phase, Voltage 208-230/460, 7.1-6/3 Amps, 60 Hz, Inlet 1 1/4 In., Outlet 1 In., Housing Material Cast Iron, Motor Enclosure TEFC, NEMA/IEC Frame 48, Motor RPM 3500, Impeller Material ANSI 316L Stainless Steel, Seal Material Standard, Carbon Ceramic Faces, Buna Elastomer and Stainless Steel Parts, Max. Head 142 Ft.	GOULDS-2HP	1
IN TANK:			
2	A.V.W. HYDRAULIC SUCTION STRAINER , port size 1-1/4NPT, Ø4" x 8" height, perforated metal 	PSD10-SS10	1
3	LOW LEVEL SWITCH (w/pipe 12"LG.) □ Madison Co 	LLS1-SS	1
4	HYDROMINDER 564 	APS1MB-564	1
5	TANK - (divided tank, common water) 30"LG x 16"W x 20"H	PSGLD3-T	1
6	COVER (LID)	PSGLD3-V	1
-	LID SUPPORT " A.V.W.	LS1	1
7	STAND (Legs: Sq.Tub.1-1/2" x 1-1/2" x 18"LG)	PSGLD3-A	1
-	GUARD (PULLYS COVER)	PSD10-PC	1
	HOSE	PSGLD3-NH	1

